


CMSD-207IR

2MP Analog Full HD Dome Camera



(Features)

- 2.8" 2MP Sony Exmor Sensor
- Effective Pixels 1952 (H) X 1236 (V)
- Min. Illumination : 0,01 lux, 0 lux IR on
- True Day & Night for surveillance 24 hours
- DNR for saving storage
- Digital WDR (Wide Dynamic Range)
- Freeze Function
- Motion Detection
- Mirror function
- Private Masking
- OSD remote control via RS485

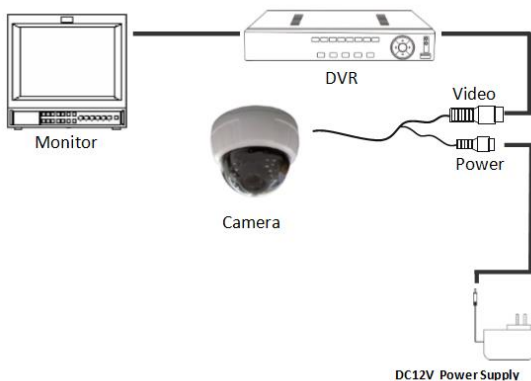

Model	CMSD-207IR
Pick-up Device	2.8" 2MP Sony Exmor Sensor
Effective Pixel	1952 (H) X 1236 (V)
Horizontal Resolution	2.4 Mega
Minimum Illumination	0,01 lux,0 lux IR on 850nm
IR Distance	25 mt
Lens	DC / MANUEL 3.3 – 10mm
S/N Ratio	More Than 50db
Sens-Up	0 - 30 X
Day / Night	Auto / External / Color / Mono
Elektronic Shutter	NTSC: 1/60s - 1/100.000s, PAL: 1/50s - 1/100.000s
OSD Functions	2D/3D DNR, DWDR, Anti Fog, Mirror, Privacy, Freeze etc.
OSD Language	English, Korean, German, French, Italian, Spanish, Portuguese, Russian, Polish, Turkish, Dutch
White Balance	ATW, AWB, Manuel, Outdoor, Indoor, AWC
Backlight	OFF, HSBLC, BLC
Defect	Live, White, Black
Power Supply	12V DC
Power Consumption	400mA
Operating Environment	-10°C - 50°C